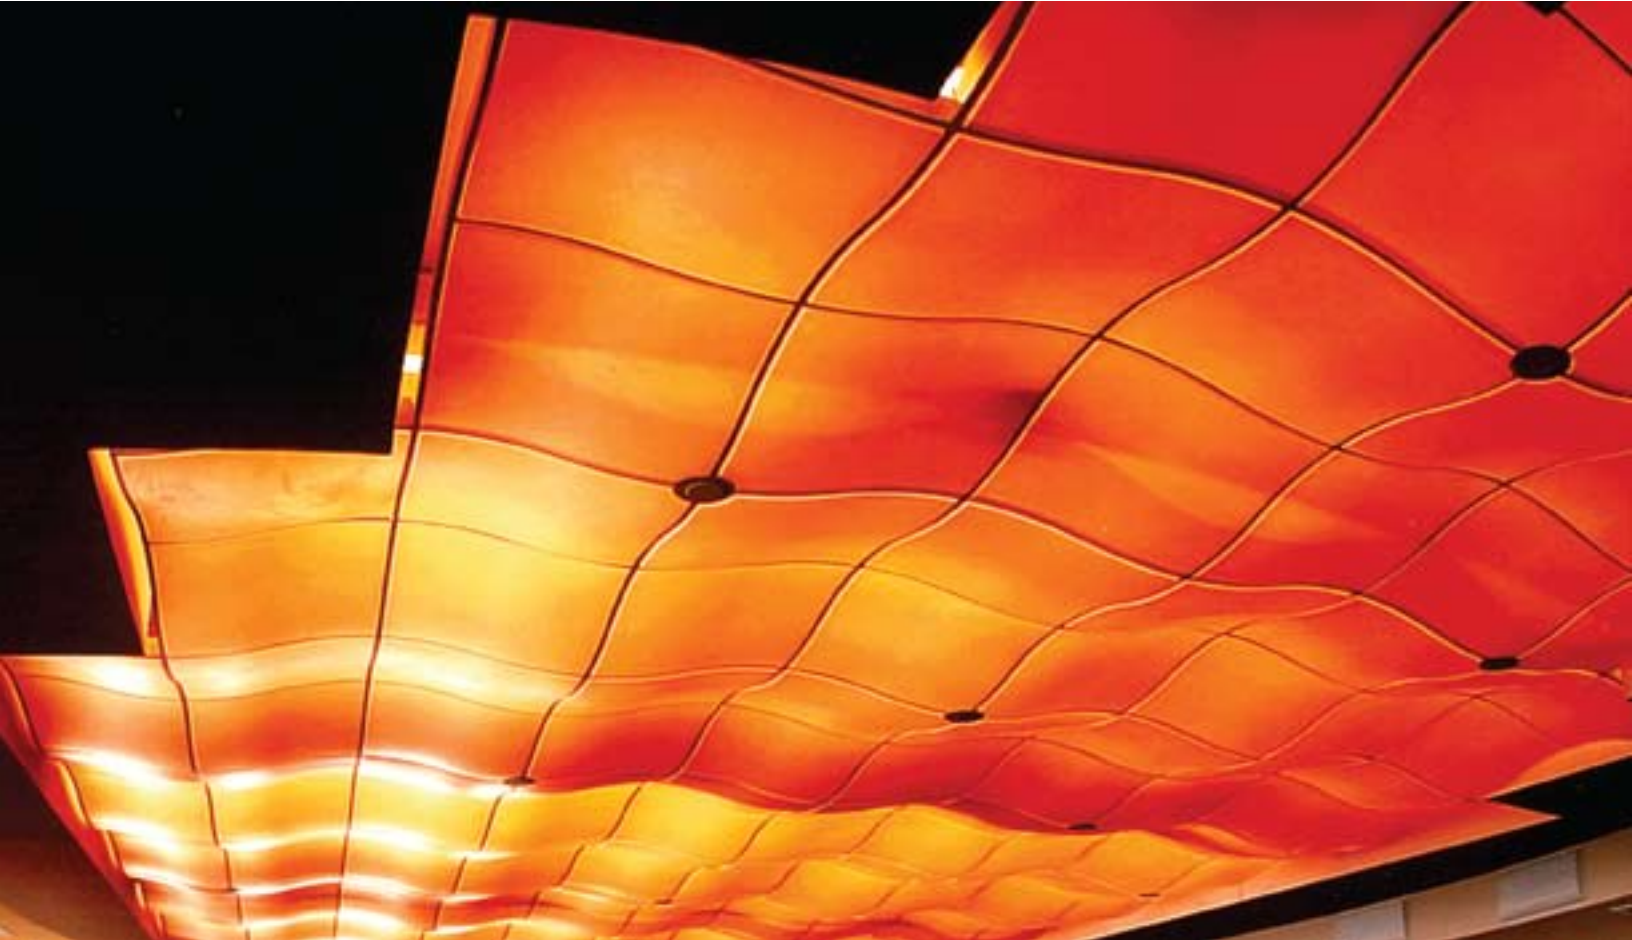


Topo™ 3-Dimensional System



Topo System 12 with Clear Translucent Panels/
DOWN Topo Suspension System in Silver Satin with Silver Laser Trim

System at a Glance

Transform flat ceiling planes into gently rolling landscapes with pre-formed panels that install easily into the narrow-profile DOWN® brand Topo suspension system.

Features and Benefits

- Two system depths (8" and 12") create varying ceiling topographies.
- Translucent and opaque Lexan® infill panels in five colors enhance existing lighting for added visual interest.
- Optional pre-engineered utility circles accommodate additional lighting and utility access.

Applications

- All commercial applications



Call 888 874.2450 for color samples



Clear Translucent



Blue Translucent



Glass Green Translucent



White Translucent



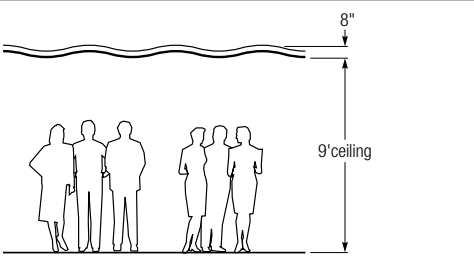
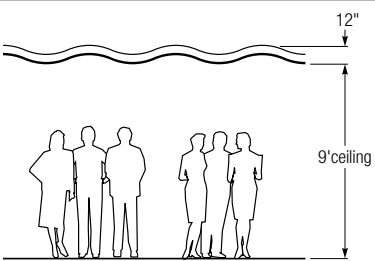
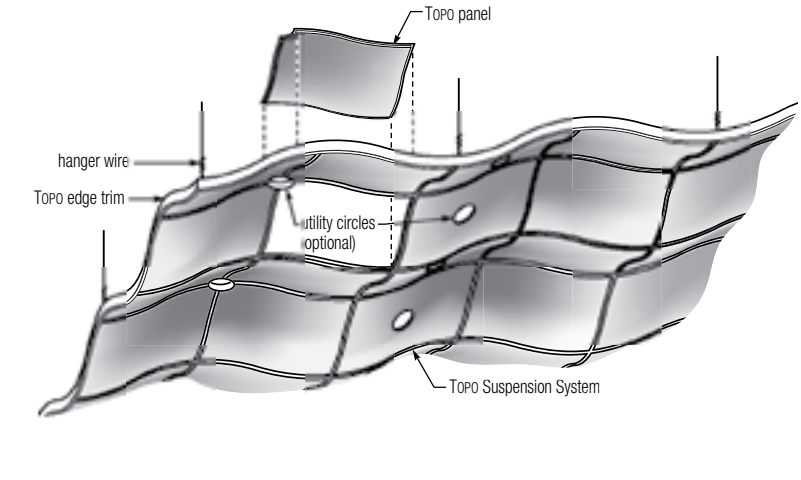

White Opaque

Topo™ 3-Dimensional System

Web Sites: usg.com
usgdesignstudio.com
sustainableceilings.com
seismicceilings.com

Technical Service 800 USG.4YOU
 Samples/Literature 888 874.2450
 Samples/Literature Fax 888 874.2348
 Customer Service 800 950.3839

See usg.com for
 the most up-to-date
 product information.

		Product Information		
		Materials	Size and Weight	Module Size
		Panels: Pre-formed Lexan. Material thickness 0.04". Suspension system: Extruded aluminum available in color-coordinated finishes. Edge trim system: painted cold-rolled steel.	Panels: 2' x 2'. System weight: 0.5 lbs./sf.	Full 2' x 2' modules only.
Finishes	Color	Light Transmission	Topo Suspension System Coordinating Colors	
	Clear Translucent	94%	Silver Satin	
	Blue Translucent	78%	Topo Blue	
	Glass Green Translucent	77%	Topo Glass Green	
	White Translucent	26%	Flat White	
	White Opaque	8%	Flat White	
Details	System Profiles	Topo System 8	Topo System 12	
				
Assembly (View from Below)				Grid-Panel Interface
				

Exposed Hanger Solutions
 For ceiling islands and other installations with exposed hanger wires, USG offers stainless steel wire and rope wire with a variety of connectors for an attractive alternative to standard 12-gauge wire. See installation guide IC453 for more information.

For More Information

Product literature
 System brochure: IC438
 Data sheet: IC422

Online tools
 – usgdesignstudio.com
 – usg.com/resources/online/tools/topogeo/index.jsp

Recycled content
 Topo panels: 0% recycled content.
 Topo suspension: 50% recycled content.
 Topo trim: 25% recycled content.

Code approval
 Lexan infill panels meet Class A requirements for flame spread and smoke developed as defined by ASTM E1264, NFPA and IBC (UBC) as tested in accordance with ASTM E 84.



Manufactured by USG Interiors, Inc.
 550 West Adams Street
 Chicago, IL 60661

The following are trademarks of USG Interiors, Inc. or a related company: DOWN, TOPO, USG. Lexan is a registered trademark of General Electric Company.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

IC422/rev. 3-08
 © 2008, USG Interiors, Inc.
 Printed in U.S.A.